

**Designation :** Rescue and Work Winch


- To be used for raising or lowering persons or material into confined spaces.
- Equipped with bolting fixture for robust fitting on the tripod.
- Plate adapted for an attachment on a square tube of 45 x 45 mm
- Lifting / Load capacity : 135 kg
- Galvanized steel wire rope with a 4,8 mm diametre
- To be used with a retractable fall arrester (EN360) when deployed for raising or lowering a person.

**Connector :**

- 1 steel screw-locking karabiner opening 17 mm, réf. FA5010117.

**Compliance :**

Conforms to EN 1496:2006 (Class A).  
Machinery Directive 2006/42/CE  
EN13157:2004

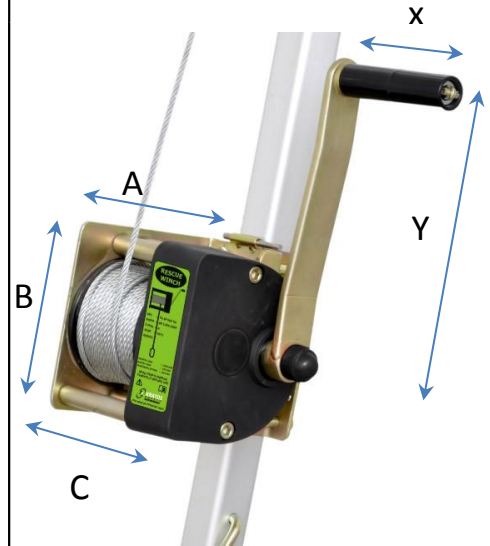

A	15,5 cm
B	17 cm
C	16 cm
X	13,5 cm
Y	28 cm

**Length of the wire rope :** 20 mtrs

**HS code**

84251920

**Carton size / Pieces**

47x27x19 / 1

**Unit Weight**

9,50 kg

**Extension from the original report SPC0170486/0850/NW dated 23<sup>rd</sup> December 2008**

**SATRA/048/2008-09**

Satra Technology Centre, N°0321  
Wyndham Way, Telford Way, Kettering,  
Northamptonshire, NN16 8SD, United Kingdom.



maj : 03/13

**ZI les portes du Dauphiné**  
**4 rue de l'Aigue**  
**69 780 St Pierre de Chandieu – France**  
**Tel : +33 (0)4 72 48 78 27 Fax : + 33 (0)4 72 48 58 32**  
**www .kratossafety.com info@kratossafety.com**

