



TECHNICAL SHEET

FA 60 008 00

Designation : Mobile anchorage point on metal beam

Attachment on steel D-Ring (inside diameter: 55 mm).


Materials: Aluminium, brass and steel.

Dimensions: Designed to be installed on beams whose width is between 100 mm and 330 mm.

	Dimensions
a	Diam. 25 mm
b	32 mm
c	19 mm
d	35 mm
e	49 mm
f	98 mm


Minimum breaking strength: > 23 kN

Compliance: EN795:2012 Type B.

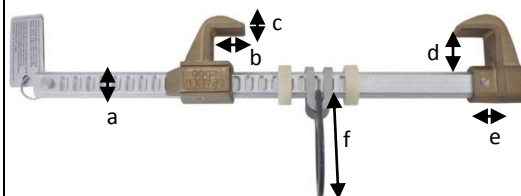

Standard use:

Anchoring at the underside of the metal beam.

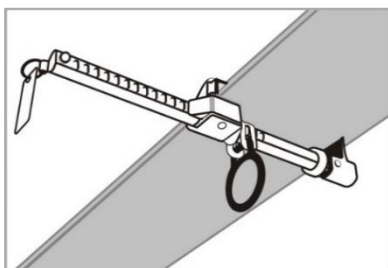

Possible use:

Anchoring on top of the metal beam.

HS code

83081010

Carton Size / Pieces

40x60x24 / 20

Unit Weight

1.85 Kg

AET : N°5744 Issue 2 Extension 1

Satra Technology Centre, N°0321
Wyndham Way, Telford Way, Kettering,
Northamptonshire, NN16 8SD, United Kingdom.

Article 11: GB07/73551

SGS United Kingdom Ltd., N° 0120
Unit 202B, Worle Parkway,
Weston-super-Mare, BS22 6WA, United Kingdom



MAJ : 07/15

ZI les portes du Dauphiné

4 rue de l'Aigue

69 780 St Pierre de Chandieu – France

Tel : +33 (0)4 72 48 78 27 Fax : + 33 (0)4 72 48 58 32

www.kratossafety.com info@kratossafety.com

