



1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20

21
22
23
24
25
26
27
28
29
30
31
32
33
34

00.7100.23

Dopustni odstopki netolerancnih dolžinskih mer v mm ISO 2768

Razred točnosti	Področje inženjskih mer v mm			
	>6	>30	>120	>400
0.5	±0.15	±0.30	±0.60	±1.20
1	±0.30	±0.60	±1.20	±2.50
3	±0.75	±1.50	±3.00	±6.00
6	±1.50	±3.00	±6.00	±12.00
f (final)	±0.05	±0.10	±0.15	±0.20
m (srednja)	±0.1	±0.2	±0.3	±0.5

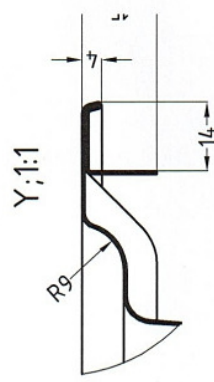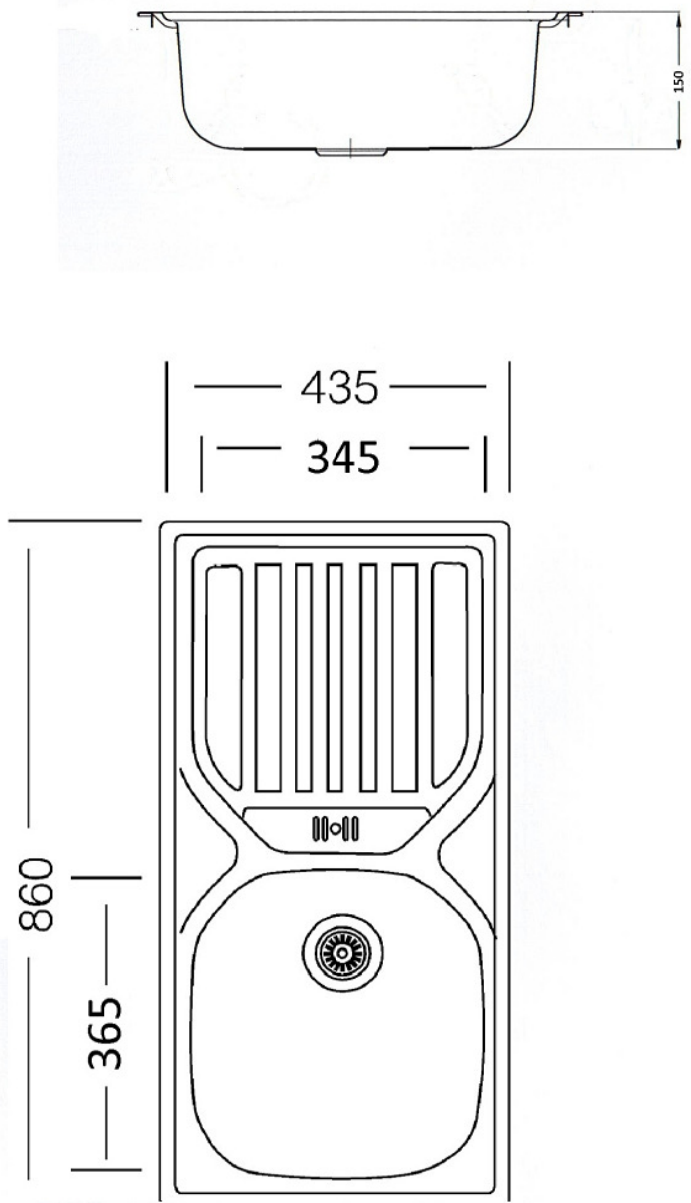

Operacija		Št. orodja	
Obdelava			
Netol. mer. ISO 2768-m		Masa	
Netol. koti ISO 2768-m		Kosov	
Material: SIST EN 10088-2 1.4301+2R		Kosov	
Konstrf. 12.1.99		Poz. Predal	
Risal. Nova Ljubljana (ECONOMIC)		42	
Prejeto: 12.1.99		Merilo:	
Dzn. Dne lme Sprememba		Koda: 1/1	
Naziv		448292	
Einbauspüle SPEED SP 860.430		Nadomestila:	
Klasifikac.štev.		Nadomestila:	